



## 0.6 / 1 kV XLPE insulated concentric conductor screen, single core cables with copper conductor

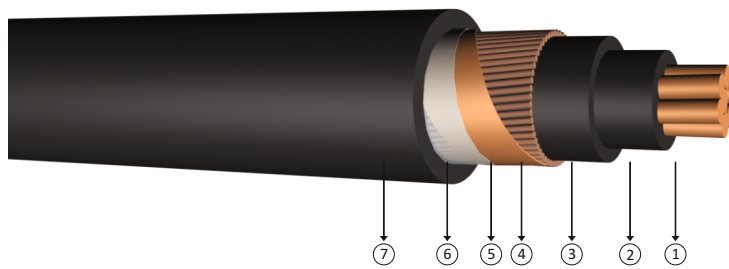

**Code:** YXCV-U, YXCV-R, CU/XLPE/SC/PVC, N2XCY

U: Solid Conductor  
R: Stranded Conductor Rigid

**Standards:** IEC 60502 - 1, VDE 0276 - 603

### Technical Data

Max. operating temperature : 90 °C  
Max. short circuit temperature : 250 °C (max. 5 sec.)  
Rated voltage : 0.6/1 kV  
Min. bending radius : 15 x D  
D : Cable outer diameter

**Application** These cables have a low dielectric loss, Indoor installations, in cable ducts, outdoor and underground for power stations, industrial plants and switching stations as well as local supply systems if increased protection is necessary. In case of mechanical damage the screen prevents any damage due to power leak to the surrounding area.

### Construction

- 1 Solid or stranded copper conductor
- 2 XLPE insulation
- 3 Inner sheath
- 4 Concentric copper wire
- 5 Copper tape as binder
- 6 Polyester tape
- 7 PVC outer jacket

DIMENSION AND WEIGHTS			ELECTRICAL PROPERTIES					
Nominal Cross Section	Overall Diameter (approx)	Net Weight (approx)	Delivery Length	DC Conductor Resistance at 20 °C Max	Current Carrying Capacity (A)			
mm <sup>2</sup>	mm	kg/km	m	ohm/km	Toprakta 20 °C		Havada 30 °C	
					***	**	***	**
1x1,5/1,5	10,5	140	1000	12,1	39	32	32	25
1x2,5/2,5	11,0	160	1000	7,41	51	43	42	34
1x4/4	11,3	200	1000	4,61	66	55	56	44
1x6/6	11,5	220	1000	3,08	82	68	71	57
1x10/10	12,5	390	1000	1,83	109	90	96	77
1x16/16	14,0	430	1000	1,15	139	115	128	102
1x25/16	15,5	550	1000	0,727	179	149	173	139
1x35/16	16,5	650	1000	0,524	213	178	212	170
1x50/25	18,0	850	1000	0,387	251	211	258	208
1x70/35	20,0	1200	1000	0,268	307	259	328	265
1x95/50	22,5	1600	1000	0,193	366	310	404	326
1x120/70	25,0	2000	1000	0,153	416	352	471	381
1x150/70	26,5	2300	1000	0,124	465	396	541	438
1x185/95	29,0	2900	1000	0,0991	526	449	626	507
1x240/120	32,0	3700	1000	0,0754	610	521	749	606

Note  
In ground : Current carrying capacities are valid under the following conditions;  
In air : 20 °C, 70 cm depth of lay, soil-thermal resistivity 1 K.m/W, load factor 0.7  
\*\*\* : 30 °C, load factor 1.0  
\*\* : Flat formation, clearance between cables; in air = 1 x Cable outer diameter, in ground = 7 cm  
\* : Trefoil formation  
Number of system : 1