


PVC insulated flat cables with flexible copper conductor

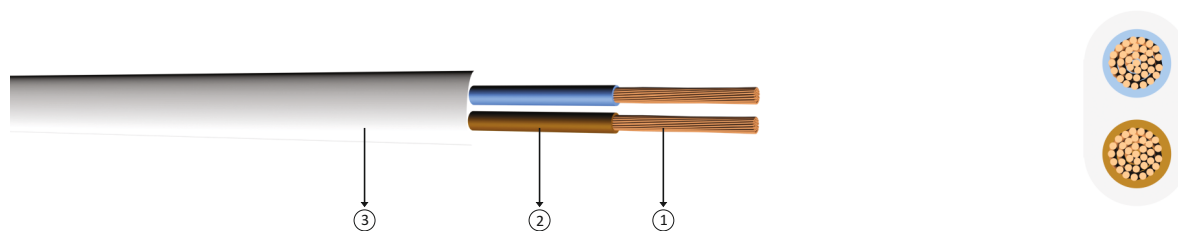

Code: H03VVH2-F, H05VVH2-F, 2192Y, 3192Y

F: Fine Stranded Conductors

Standards: EN 50525-2-11, BS EN 50525-2-11
DIN EN 50525-2-11 (VDE0285-525-2-11)

Technical Data

Max. operating temperature : 70 °C
Max. short circuit temperature : 160 °C (max. 5 sec.)
Rated voltage : 300/300 V
300/500 V

Application

For use in passenger and goods lifts and special applications like hoists and travelling cranes.

** : 300/300 V (H03VVH2-F, 2192Y)

Construction

- 1 Fine stranded copper conductors
- 2 PVC insulation
- 3 PVC outer jacket

DIMENSION AND WEIGHTS			ELECTRICAL PROPERTIES		
Nominal Cross Section	Outer Dimension (approx)	Net Weight (approx)	Delivery Length	DC Conductor Resistance at 20° C Max	Current Carrying Capacity
mm ²	mm (H x W)	kg/km	m	ohm/km	A
2x0,5*	3,4x5,4	33	100	39,00	3
2x0,75*	3,4x5,8	39	100	26,00	6
2x0,75	4,1x6,6	49	100	26,00	6
2x1,0	4,3x6,9	55	100	19,50	10