


18/30 kV or 19/33 kV XLPE insulated, single core cables with copper conductor

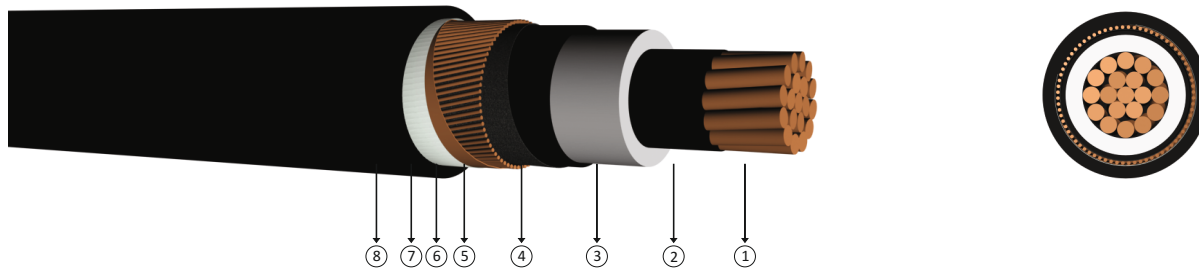

Code: N2XS2Y, CU/XLPE/CWS/PE

Standards: IEC 60502 - 2, VDE 0276 - 620, BS 7870-4.10

Technical Data

Max. operating temperature : 90 °C
 Max. short circuit temperature : 250 °C (max. 5 sec.)
 Rated voltage : 18/30 kV
 : 19/33 kV
 Min. bending radius : 15 x D
 D : Cable outer diameter

Application

These are cables with low dielectric losses used in energy networks with sudden load changes. Laid in residential or industrial areas, underground or in ducts.

Construction

- 1 Stranded copper conductors
- 2 Inner semi conductive layer
- 3 XLPE insulation
- 4 Outer semi conductive layer
- 5 Semi conductive tape
- 6 Copper screen
- 7 Polyester tape
- 8 PE outer jacket.

DIMENSION AND WEIGHTS			ELECTRICAL PROPERTIES									
Nominal Cross Section	Overall Diameter (approx)	Net Weight (approx)	Delivery Length	DC Conductor Resistance at 20 °C Max	DC Conductor Resistance at 90 °C Max	Operation Inductance		Operation Capacitance	Current Carrying Capacity (A)			
mm ²	mm	kg/km	m	ohm/km	ohm/km	*** mH/km	** mH/km	µF/km	In ground at 20 °C		In air at 30 °C	
									***	**	***	**
1x35/16	36,5	1250	1000	0,524	0,6707	0,688	0,474	0,123	214	192	233	202
1x50/16	37,5	1400	1000	0,387	0,4954	0,662	0,453	0,135	251	226	279	241
1x70/16	39,5	1650	1000	0,268	0,3430	0,631	0,429	0,151	306	276	348	299
1x95/16	41,0	1950	1000	0,193	0,2470	0,607	0,410	0,166	363	329	421	362
1x120/16	43,0	2250	1000	0,153	0,1958	0,588	0,397	0,180	410	373	483	416
1x150/25	44,5	2650	1000	0,124	0,1587	0,570	0,363	0,194	449	415	540	469
1x185/25	46,5	3050	1000	0,0991	0,1268	0,554	0,372	0,208	503	468	615	536
1x240/25	49,5	3650	1000	0,0754	0,0965	0,534	0,359	0,229	576	541	718	630
1x300/25	51,5	4300	1000	0,0601	0,0769	0,517	0,347	0,248	641	608	812	717
1x400/35	55,0	5400	500	0,0470	0,0602	0,495	0,334	0,276	697	684	904	823
1x500/35	58,0	6450	500	0,0366	0,0468	0,479	0,324	0,301	768	762	1011	929
1x630/35	62,0	7750	500	0,0283	0,0362	0,463	0,314	0,330	858	847	1128	1043

Note
 In ground : Current carrying capacities are valid under the following conditions;
 : 20 °C, 70 cm depth of lay, soil-thermal resistivity 1 K.m/W, load factor 0.7
 In air : 30 °C, load factor 1.0
 *** : Flat formation, clearance between cables; in air = 1 x Cable outer diameter, in ground = 7 cm
 ** : Trefoil formation
 Number of system : 1