


# 18/30 kV or 19/33 kV XLPE insulated double steel tape armoured, three core cables with copper conductor

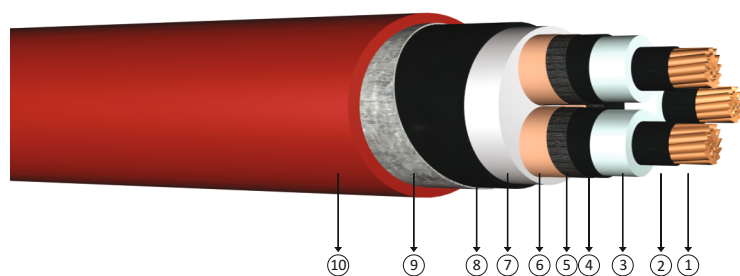

**Code:** YXC8VZ4V-R, N2XSEYBY, CU/XLPE/CTS/PVC/STA/PVC

R: Stranded Conductor Rigid

**Standards:** IEC 60502 - 2, VDE 0276-620, BS 6622

### Technical Data

Max. operating temperature : 90 °C  
 Max. short circuit temperature : 250 °C (max. 5 sec.)  
 Rated voltage : 18/30 kV  
 : 19/33 kV  
 Min. bending radius : 15 x D  
 D : Cable outer diameter

### Application

These are cables with low dielectric losses used in energy networks with sudden load changes. Laid in residential or industrial areas, underground or in ducts.

### Construction

- 1 Stranded copper conductors      4 Outer semi conductive layer      7 Filler      10 PVC outer jacket
- 2 Inner semi conductive layer      5 Semi conductive tape      8 Inner sheath
- 3 XLPE insulation      6 Copper screen      9 Galvanized double steel tape

DIMENSION AND WEIGHTS				ELECTRICAL PROPERTIES				
Nominal Cross Section	Overall Diameter (approx)	Net Weight (approx)	Delivery Length	DC Conductor Resistance at 20 °C Max	Operation Inductance (approx)	Operation Capacitance (approx)	Current Carrying Capacity (A)	
mm <sup>2</sup>	mm	kg/km	m	ohm/km	mH/km	µF/km	In ground at 20 °C	In air at 30 °C
3x35/16	74,5	7150	500	0,5240	0,457	0,114	-	-
3x50/16	77,5	8050	500	0,3870	0,434	0,124	214	217
3x70/16	81,5	9150	500	0,2680	0,410	0,137	261	269
3x95/16	86,5	11050	250	0,1930	0,389	0,150	313	326
3x120/16	91,0	12400	250	0,1530	0,372	0,163	356	377
3x150/25	94,0	13800	250	0,1240	0,360	0,174	400	426
3x185/25	98,0	15450	250	0,0991	0,348	0,188	441	488
3x240/25	105,5	18250	250	0,0754	0,331	0,209	510	576
3x300/25	110,5	20850	200	0,0601	0,321	0,226	-	-
3x400/35	118,5	25100	200	0,0470	0,307	0,251	-	-

Note : Current carrying capacities are valid under the following conditions;  
 In ground : 20 °C, 70 cm depth of lay, soil-thermal resistivity 1 K.m/W, load factor 0.7  
 In air : 30 °C, load factor 1.0  
 Number of system : 1