




20.3/35 kV or 20.8/36 kV XLPE insulated, longitudinally sealed, single core cables with copper conductor

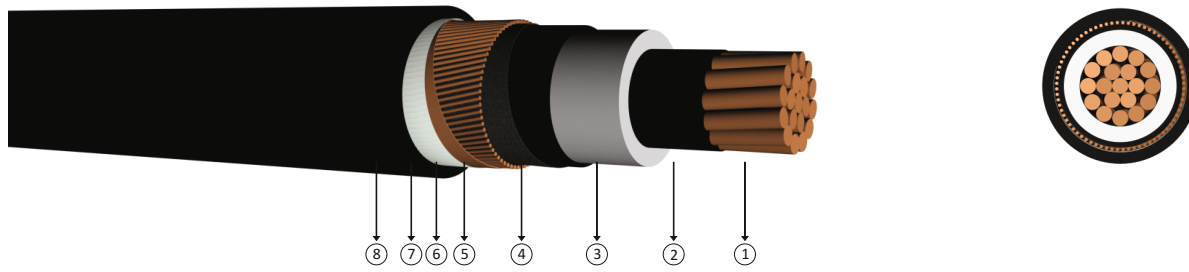

Code: N2XS(F)2Y, CU/XLPE/LW/CWS/LW/PE

Standards: HD 620 S2, TSEK

Technical Data

Max. operating temperature	: 90 °C
Max. short circuit temperature	: 250 °C (max. 5 sec.)
Rated voltage	: 20.3/35 kV 20.8/36 kV
Min. bending radius	: 15 x D
D	: Cable outer diameter

Application

These are cables with low dielectric losses used in energy networks with sudden load changes. Laid in residential or industrial areas, underground or in ducts. If the cable gets water inside due to the mechanical damages, swellable tapes prevent the movement of the water inside the cable.

Construction

- 1** Stranded copper conductors **3** XLPE insulation **5** Semi conductive swelling tape **7** Swellable tape
- 2** Inner semi conductive layer **4** Outer semi conductive layer **6** Copper screen **8** PE outer jacket

DIMENSION AND WEIGHTS			ELECTRICAL PROPERTIES									
Nominal Cross Section	Overall Diameter (approx)	Net Weight (approx)	Delivery Length	DC Conductor Resistance at 20 °C Max	DC Conductor Resistance at 90 °C Max	Operation Inductance		Operation Capacitance	Current Carrying Capacity (A)			
mm ²	mm	kg/km	m	ohm/km	ohm/km	*** mH/km	** mH/km	µF/km	In ground at 20 °C		In air at 30 °C	
									***	**	***	**
1x35/16	37,5	1250	1000	0,524	0,6707	0,690	0,480	0,115	214	192	233	202
1x50/16	38,5	1450	1000	0,387	0,4954	0,664	0,459	0,125	251	226	279	241
1x70/16	40,5	1700	1000	0,268	0,3430	0,633	0,434	0,140	306	276	348	299
1x95/16	42,0	2000	1000	0,193	0,2470	0,609	0,416	0,153	363	329	421	362
1x120/16	44,0	2250	1000	0,153	0,1958	0,590	0,401	0,165	410	373	483	416
1x150/25	45,5	2700	1000	0,124	0,1587	0,572	0,389	0,178	449	415	540	469
1x185/25	47,5	3050	1000	0,0991	0,1268	0,556	0,376	0,191	503	468	615	536
1x240/25	50,0	3650	1000	0,0754	0,0965	0,535	0,363	0,209	576	541	718	630
1x300/25	52,5	4300	1000	0,0601	0,0769	0,519	0,351	0,226	641	608	812	717
1x400/35	55,5	5450	500	0,0470	0,0602	0,497	0,338	0,252	697	684	904	823
1x500/35	59,0	6500	500	0,0366	0,0468	0,481	0,328	0,274	768	762	1011	929
1x630/35	62,5	7800	500	0,0283	0,0362	0,464	0,317	0,300	858	847	1128	1043

Note
 In ground : 20 °C, 70 cm depth of lay, soil-thermal resistivity 1 K.m/W, load factor 0.7
 In air : 30 °C, load factor 1.0
 *** : Flat formation, clearance between cables; in air = 1 x Cable outer diameter, in ground = 7 cm
 ** : Trefoil formation
 Number of system : 1