



INDOOR CABLES | Multi Pair Intercom Cables PD-H

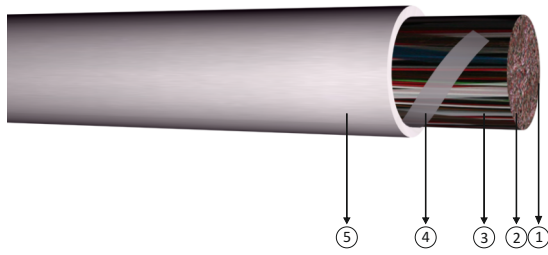

Application

They are generally used in switchboards and subscriber distributions in indoor lines.

Construction

Conductor : Annealed Copper Wire

Insulation : Solid Polyethylene

Outer Sheath : HFFR

Construction

- 1 Conductor
- 2 Insulation
- 3 Cable Core
- 4 Wrapping
- 5 Outer Sheath

Conductor Diameter (mm)	Number of Pairs (mm)	Cable Diameter (mm)	Net Weight (kg/km)	Coil Length (m)
0,5	2	4,9	31	2000
0,5	3	6,4	42	2000
0,5	4	6,6	50	2000
0,5	6	7,7	63	2000
0,5	10	8,4	91	2000
0,5	20	11,3	151	2000
0,5	30	12,6	204	2000
0,5	50	15,2	314	2000
0,5	100	20,8	583	1000
0,5	200	28,1	1082	1000

Electrical Properties	Conductor Diameter (mm)	
	0,5	
Conductor Resistance (Ω /km) 20 °C max.	98	
Mutual Capacitance 800 Hz	56	
Capacitance Unbalance (pF/km)	500	
Insulation Resistance (Megaohm-km)	5000	
Dielectric Strength (VDC)	1500	