


# RG 11 / U-4 Cu / Cu Sn / Y Coaxial Cables

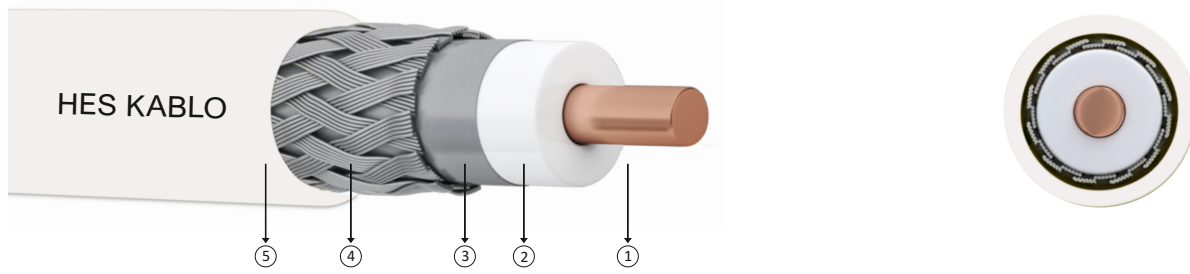

**Code:** RG 11 / U-4 Cu / Cu Sn / Y **Standard:** TSE / TS EN 50117-9-2

**RG** : Radio Frequency  
**11** : Wire Diameter  
**U-4** : Screening  
**Cu/CuSn:** Copper Conductor /Aluminum Foil, Tinned Copper Wire Braid  
**Y** : PVC Sheath

### Technical Properties

Conductor Diameter : 1,63±0,02 mm  
 Insulation Diameter : 7,2±0,2 mm  
 First Screen : AL-PET Foil (% 100 Coverage)  
 Second Screen : Tinned Copper Wire Braid  
 Overall Diameter : 10,0±0,3 mm  
 Sheath Colour : White  
 Sheath Material : PVC  
 Net Weight : 104 kg/km ±%3  
 Package : 100 - 300 m Coil / 500 - 1000 m Drum

### Electrical Properties

Impedance : 75±3 Ohm  
 Nominal Capacitance : 54±2 pF/m (Conductor/Screen)  
 Velocity of Prop. : %82±2  
 Insulation Resistance : 2000 Mohm x km (Min.)  
 Test Voltage (AC 50 Hz) : 3000 V / 1 Minutes  
 Operating Temperature : -40°C, +70°C  
 Min. Bending Radius : 10 x D (mm) (D:Overall Diameter)  
 Class of Screen : Class C  
 CPR Fire Class : Euro - Class E

### Construction

- 1- Conductor : Solid Annealed Copper (TS EN 60228 Class 1)
- 2- Insulation : Foam Skin Polyethylene (TS EN 50290-2-37)
- 3- First Screen : One Side Copolyedmer Coated Aluminum Foil (%100 Coverage)
- 4- Second Screen : Tinned Copper Wire Braid
- 5- Outer Sheath : PVC Sheath With White Colour (TS EN 50290-2-22)

### Applications

Used in indoor CATV (Cable TV) systems, individual - central antenna and satellite distribution systems, CCTV camera security systems.

### Attenuation (Max)

Mhz							
5	200	400	800	1000	2150	2400	3000
dB/100 m							
1,8	6,7	9,5	13,5	15,3	23,0	25,6	29,9

### Return Loss (Min)

Mhz			
5-470	470-1000	1000-2000	2000-3000
dB			
>23	>20	>18	>16